

PL-32C20D

2MP 20x 4 in 1 Analog PTZ



- 1/2.9" Low light 1080P Sony Sensor
- Max 25/30fps@1080P Recording
- AHD/TVI/CVI/CVBS Video Output
- IP66 Rating
- DWDR/BLC/2D&3D Noise Reduction



System Overview

PL-32C series high speed dome is a range of competitive PTZ with compact design. The series is ideal for entry level choices for SMB solutions, such as buildings, factories, schools which are designed for indoor and outdoor.

With pan speed up to 200°/s, and tilt speed up to 100°/s, promise a large video coverage and secured details. It's equipped with cutting edge IR Array LED of up to 120m and rugged casing rated with IP66.

Functions

Advanced 4 in 1 technology

PS-32C series is built in with advanced 4 in 1 technology, it's equipped with UTC chipset on board which could support to adjust HD analog signal output flexibly, such as AHD/TVI/CVI/CVBS. It's the final solution for true plug-n-play to work with any brand of HD analog DVR seamlessly.

Harsh conditions

ZKTeco PTZ cameras could run normally in harsh environment, working temperature range from -40°C ~ +60°C with 95% humidity.

Technical Parameters

Camera

| | | | |
|--------------|----------------------------------------|--------------------|-------------------------------------------------|
| Model | PL-32C20D | Scanning System | Progressive |
| Image Sensor | Low light 1080P 1/2.9 inch Sony Sensor | Electronic Shutter | 1/25s - 1/50,000s |
| Lens | 20X f=4.7mm~94mm | Min. illumination | Color : 0.1Lux B/W : 0.01Lux (0 Lux when IR on) |
| | | IR Distance | Up to 120 meters |

Video

| | | | |
|-------------------|--------------------------|-----------------|----------------------------|
| Resolution | 1080P(1920x1080) | WDR | DWDR |
| Flip | 90° | Day/Night | Auto(ICR)/Color/B/W |
| Privacy Mask | Up to 4 areas | White Balance | Auto/Manual/Indoor/Outdoor |
| Baud Rate (RS485) | 2400/4800/9600/19200 bps | Gain Control | Auto |
| BLC | Supported | Noise Reduction | 2D & 3D DNR |

Interface

| | | | |
|-----------------|---|-----------|-----|
| Video Interface | 1 | Alarm I/O | 4/1 |
| RS485 | 1 | | |


P/T

| | | | |
|----------------|--------------------------------------------------------------------------|----------------------|---------------------|
| Pan/Tilt Range | Pan: 0°~360°, Tilt: 0°~90° | Ingress Protection | IP66 |
| Pan Speed | 0~200°/s | Working Environment | -40 C ~+60 C |
| Tilt Speed | 0~100°/s | Power Supply | DC24V/AC24V±10% |
| Preset | 128 | Lightning Protection | EDS 4000V |
| Preset Speed | 200°/S | OSD Menu | Supported |
| PTZ Mode | 4 Scan, 4 Tour, 4 Pattern | Default Bracket | Wall mount |
| Idle Motion | Activate preset/Scan/ Tour if there is no command in specified period | Dimensions | Φ185(mm)×314.35(mm) |
| Protocol | Pelco-D, Pelco-P | Net Weight | 3.15KG |
| | | Gross Weight | 4KG |

Ordering Information

| Type | Part Number | Description |
|----------------|-------------|------------------------|
| 2MP PTZ Camera | PL-32C20D | 2MP HD analog PTZ, 20x |

Dimensions (mm)

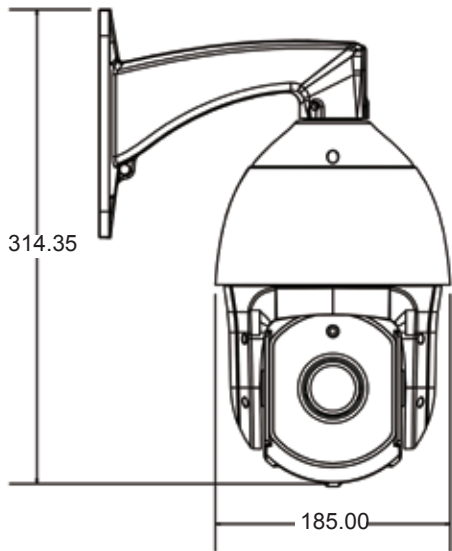

Accessories

Included:



Wall Mount



DC24V/AC24V±10%
Power Supply



More details

ZKTECO CO.,LTD.
www.zkteco.com
E-mail: sales@zkteco.com

Copyright ©2018 ZKTECO CO., LTD. All rights reserved.

